




Add location hole at the center for version C, use socket head tool to thread the screw through the hole for positioning, then set the screw


Fix screws in the sequence of ①, ②, ③. See detailed method in the video

Description of Fixed Tabletop and Panel

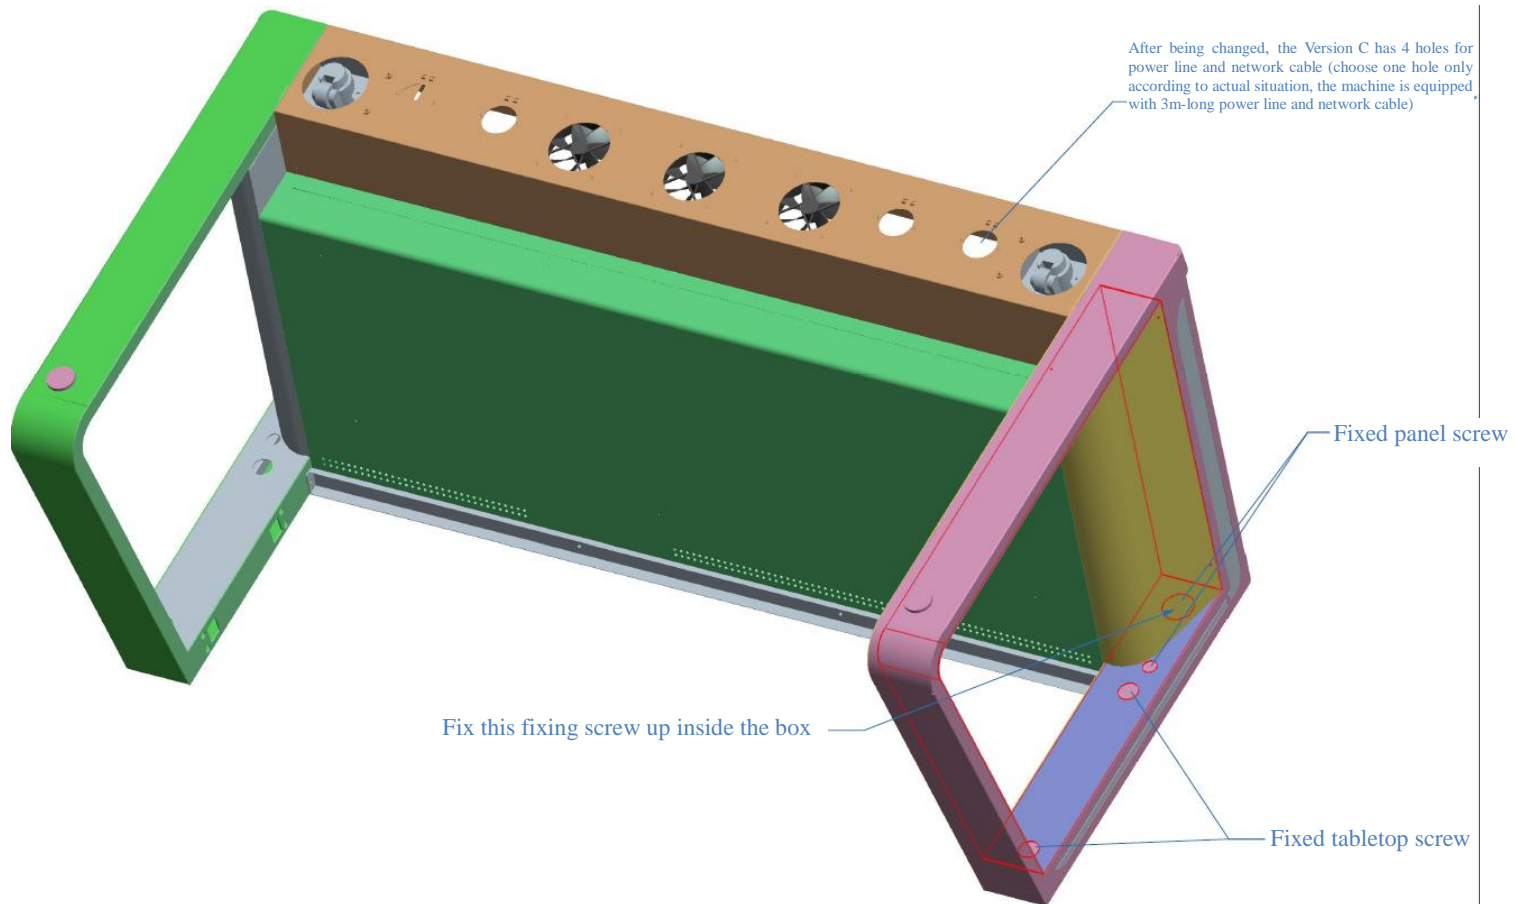

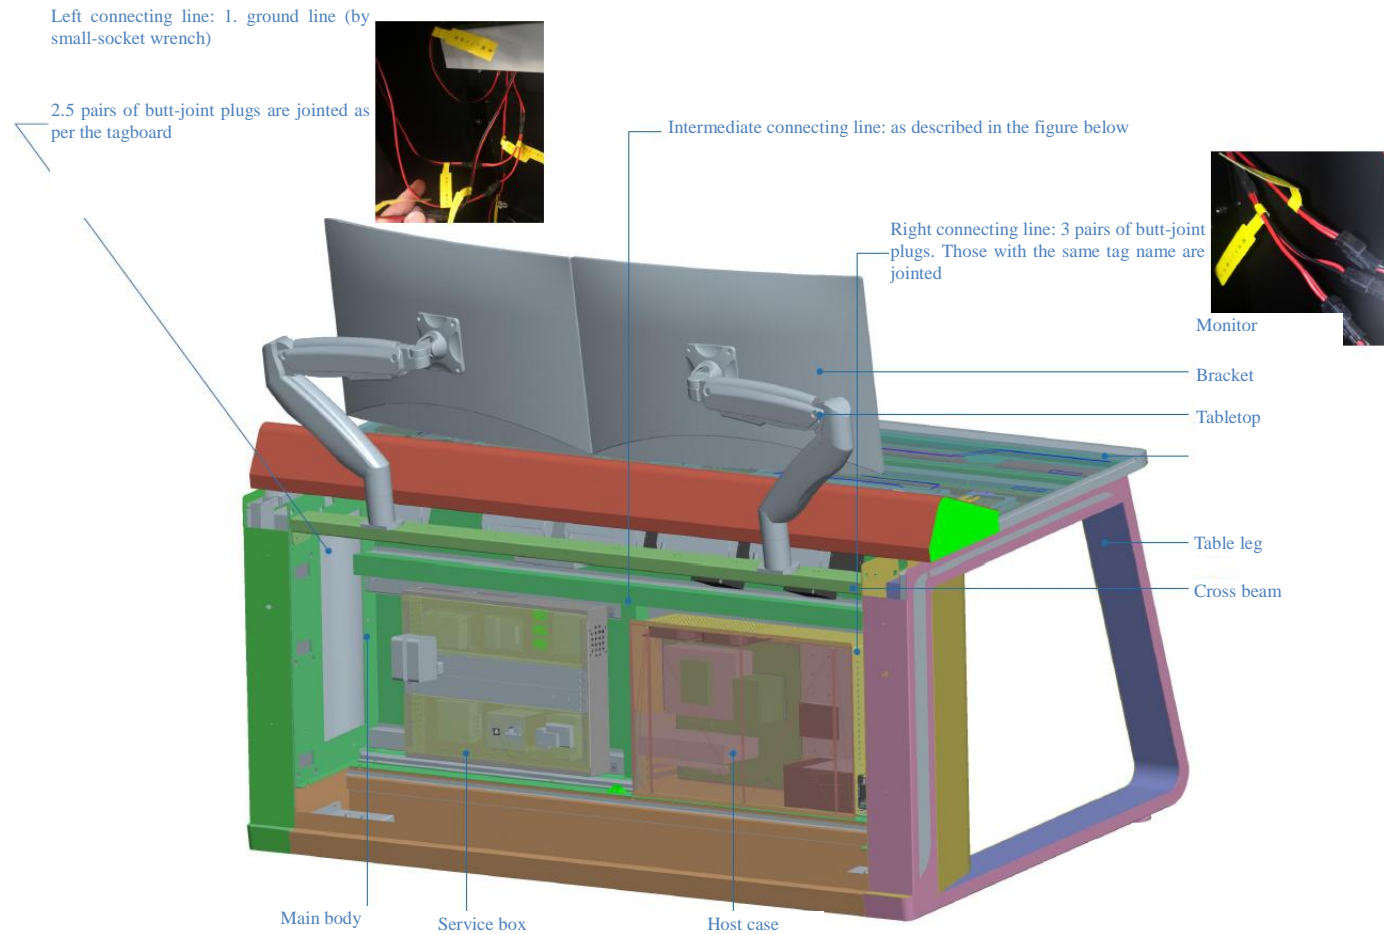

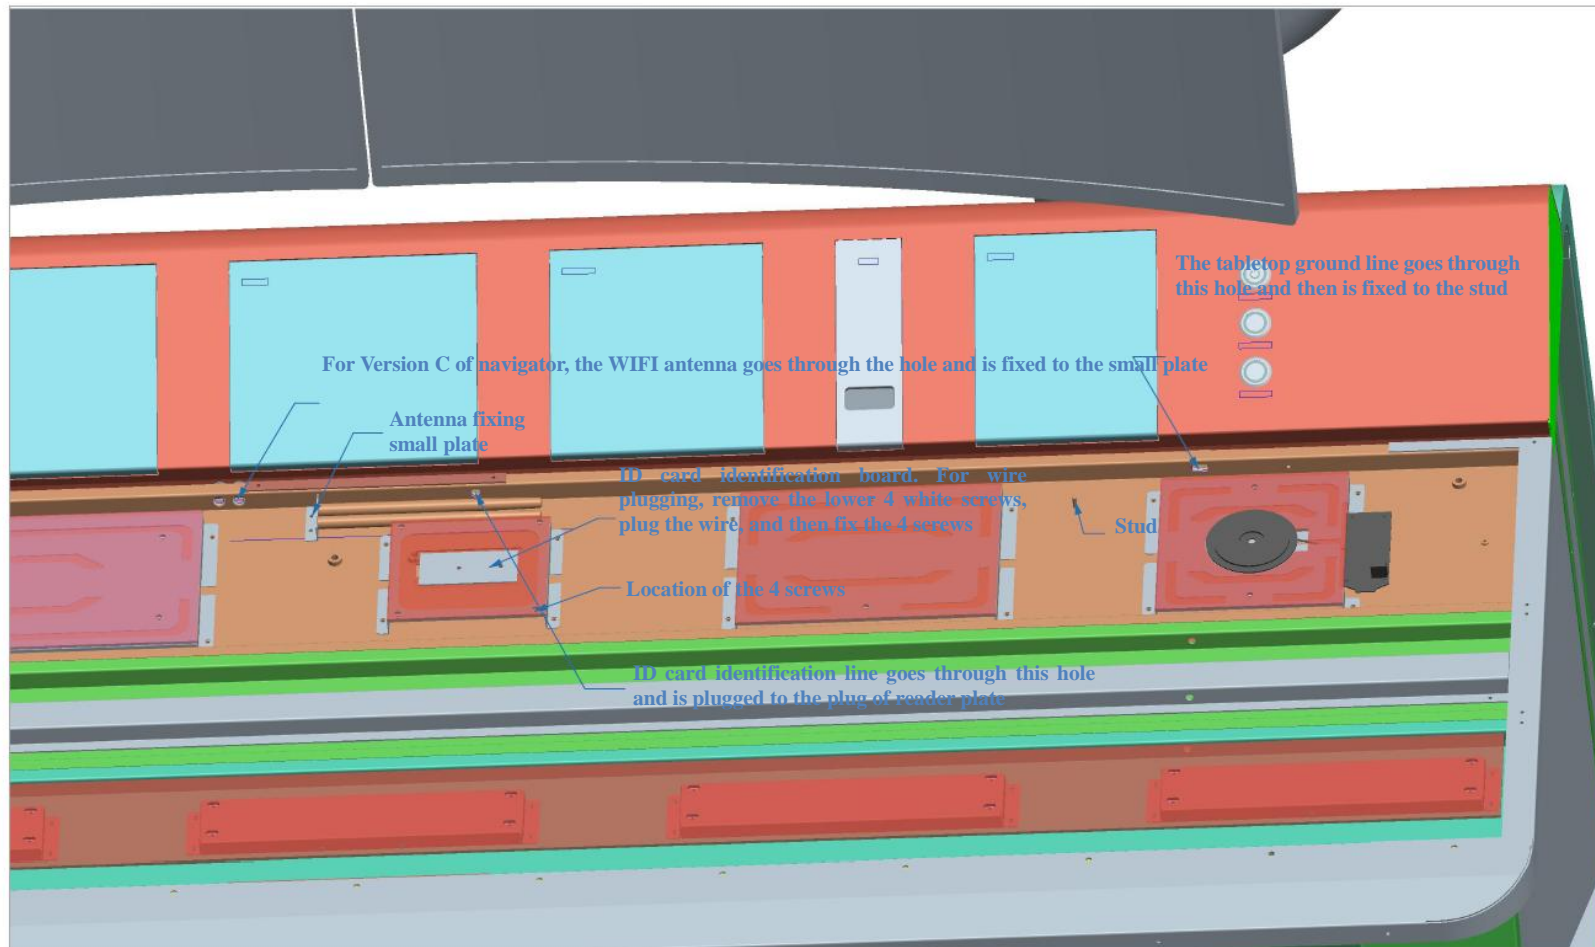

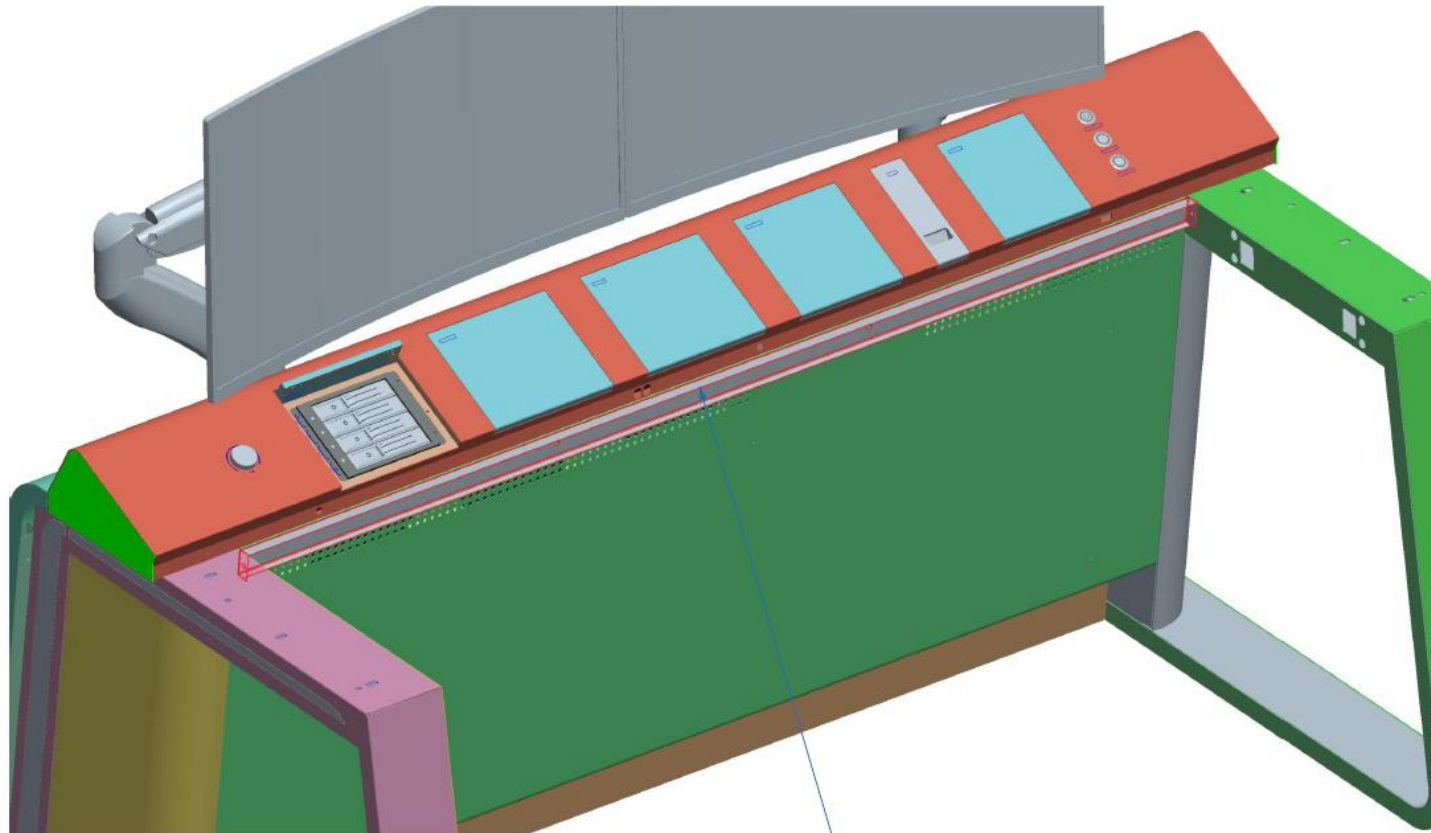

For Version C of navigator, a tabletop supporting beam is installed via 4 screw holes